


Dimensions and Mechanical Data

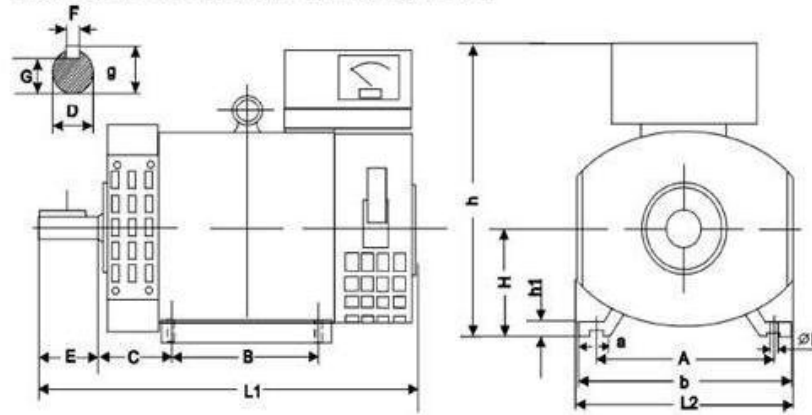

OVERALL & INSTALLTION DIMENSIONS																		
Model	Output		Mounting Dimensions (mm)									Overall Dimensions (mm)						
	kw	kVA	A	B	C	D	E	F	G	H	K	a	b	h1	h	L1	L2	g
ST-10	10	12.5	279	203	121	ø42	110	12	37	180	15	60	339	25	498	610	365	44.8

- 10,000 watts continuous; surge rating approximately 10% of rated output
- 4-pole 1800 RPM generator for 60Hz
- Sealed bearings that are packed with high temperature grease
- Western style rectifier
- Diesel engine requirement approximately 15 HP
- Gasoline engine requirement is approximately 20 HP
- Shaft diameter: 42 mm
- Weight: 280 lbs.
- 2-bearing unit
- Metal fan
- 4 wire unit
- Has 4 brushes
- Series wiring provides 240Volts at 41.6 amps (provides the ability to center tap to get 120VAC at the same time)
- Parallel wiring provides 120Volts at 83.3 amps (120VAC only)
- Comes with the operations manual
- Bearings can support vertical installations